


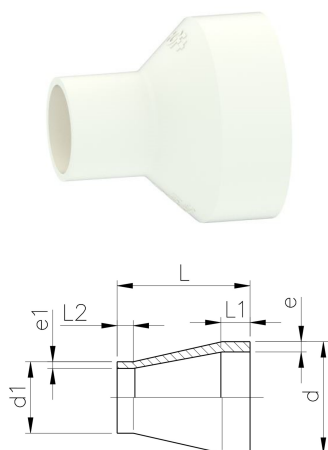

## Redukce SYGEF ECTFE SDR21/PN10

### Provedení:

- Materiál: ECTFE

| d - d1<br>(mm) | SDR | PN<br>(bar) | FM | Kód                | Váha<br>(kg) | e<br>(mm) | e1<br>(mm) | L<br>(mm) | L1<br>(mm) | L2<br>(mm) |
|----------------|-----|-------------|----|--------------------|--------------|-----------|------------|-----------|------------|------------|
| 25 - 20        | 21  | 10          | IR | <b>737 908 107</b> | 0.013        | 1.9       | 1.9        | 50        | 22         | 22         |
| 32 - 20        | 21  | 10          | IR | <b>737 908 108</b> | 0.016        | 2.4       | 1.9        | 50        | 22         | 22         |
| 32 - 25        | 21  | 10          | IR | <b>737 908 118</b> | 0.017        | 2.4       | 1.9        | 50        | 22         | 22         |
| 40 - 20        | 21  | 10          | IR | <b>737 908 109</b> | 0.023        | 2.4       | 1.9        | 58        | 22         | 24         |
| 40 - 25        | 21  | 10          | IR | <b>737 908 119</b> | 0.022        | 2.4       | 1.9        | 55        | 22         | 24         |
| 40 - 32        | 21  | 10          | IR | <b>737 908 129</b> | 0.026        | 2.4       | 2.4        | 55        | 22         | 24         |
| 50 - 25        | 21  | 10          | IR | <b>737 908 110</b> | 0.034        | 3.0       | 1.9        | 60        | 22         | 25         |
| 50 - 32        | 21  | 10          | IR | <b>737 908 120</b> | 0.040        | 3.0       | 2.4        | 60        | 22         | 25         |
| 50 - 40        | 21  | 10          | IR | <b>737 908 130</b> | 0.039        | 3.0       | 2.4        | 60        | 22         | 25         |
| 63 - 32        | 21  | 10          | IR | <b>737 908 111</b> | 0.050        | 3.0       | 2.4        | 65        | 22         | 25         |
| 63 - 40        | 21  | 10          | IR | <b>737 908 121</b> | 0.052        | 3.0       | 2.4        | 65        | 22         | 25         |
| 63 - 50        | 21  | 10          | IR | <b>737 908 131</b> | 0.059        | 3.0       | 3.0        | 65        | 22         | 25         |
| 75 - 40        | 21  | 10          | IR | <b>737 908 112</b> | 0.078        | 3.6       | 2.4        | 68        | 24         | 25         |
| 75 - 50        | 21  | 10          | IR | <b>737 908 122</b> | 0.078        | 3.6       | 3.0        | 65        | 24         | 25         |
| 75 - 63        | 21  | 10          | IR | <b>737 908 132</b> | 0.082        | 3.6       | 3.0        | 65        | 24         | 25         |
| 90 - 63        | 21  | 10          | IR | <b>737 908 113</b> | 0.123        | 4.3       | 3.0        | 75        | 25         | 30         |
| 90 - 75        | 21  | 10          | IR | <b>737 908 123</b> | 0.136        | 4.3       | 3.6        | 75        | 25         | 35         |
| 110 - 63       | 21  | 10          | IR | <b>737 908 114</b> | 0.218        | 5.3       | 3.0        | 90        | 30         | 30         |
| 110 - 75       | 21  | 10          | IR | <b>737 908 124</b> | 0.224        | 5.3       | 3.6        | 90        | 30         | 35         |
| 110 - 90       | 21  | 10          | IR | <b>737 908 134</b> | 0.242        | 5.3       | 4.3        | 90        | 30         | 35         |

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.

Přeloženo z originálu výrobce

PPS Engineering CZ s.r.o., zastoupení Georg Fischer Piping Systems

info@ppsengineering.cz

www.ppsengineering.cz

© PPS 06/2021