


INSTAFLEX Weld-in saddle PB

* on request

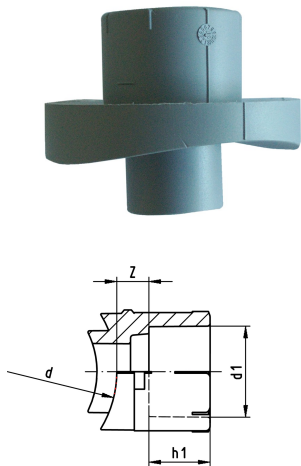

	d - d1 (mm)	Code	SP	Weight (kg)	h1 (mm)	z (mm)
*	40 - 20	761 068 000	5	0.011	15	11
	50 - 20	761 068 003	5	0.011	15	11
	50 - 25	761 068 004	5	0.014	18	11
	50 - 32	761 068 005	5	0.019	20	11
	63 - 20	761 068 006	5	0.012	15	11
	63 - 25	761 068 007	5	0.016	18	11
	63 - 32	761 068 008	5	0.022	20	11
	75 - 20	761 068 009	5	0.014	15	12
	75 - 25	761 068 010	5	0.017	18	12
	75 - 32	761 068 011	5	0.022	20	12
	90 - 20	761 068 012	5	0.018	15	13
	90 - 25	761 068 013	5	0.021	18	13
	90 - 32	761 068 014	5	0.027	20	13
	110 - 20	761 068 015	5	0.019	15	14
	110 - 25	761 068 016	5	0.022	18	14
	110 - 32	761 068 017	5	0.020	20	14

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>