




IR PVC-U check valve type 561 With IR fusion spigots

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length
- For welding on IR-63 Plus and IR-110 A
- Special Clamping inserts needed on IR-63 Plus and IR-110 A
- Only use Tangit KS Cleaner (799298023)

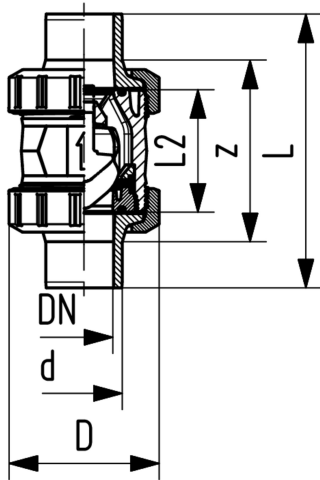

d	DN	PN	SDR	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(mm)	(bar)		($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(l/min)						
20	15	16	9.0	180	161 561 972	1	0.130	161 561 982	1	0.130
25	20	16	13.6	380	161 561 973	1	0.188	161 561 983	1	0.290
32	25	16	13.6	460	161 561 974	1	0.296	161 561 984	1	0.320
40	32	16	13.6	850	161 561 975	1	0.530	161 561 985	1	0.530
50	40	16	13.6	1080	161 561 976	1	0.762	161 561 986	1	0.810
63	50	16	13.6	1670	161 561 977	1	1.419	161 561 987	1	1.450

d	D	L	L2
(mm)	(mm)	(mm)	(mm)
20	50	129	56
25	58	141	65
32	68	151	71
40	84	170	85
50	97	192	89
63	124	219	101

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>