




**ELGEF Plus Branch saddle topload PE100**  
**d280- d630mm / SDR11 / Outlet d90-d125 mm**

- 10 bar Gas / 16 bar Water
- Branch Saddle for assembling as Topload with tool 799.350.477; angle adaptors (799.350.340) for fusion cable required
- Electrofusion outlet with integrated pipe fixation
- Protected wire without medium contact
- 4 mm pin connectors
- Limited path fusion indicators

**Note:**

\* FM 1613 approved - 15 bar

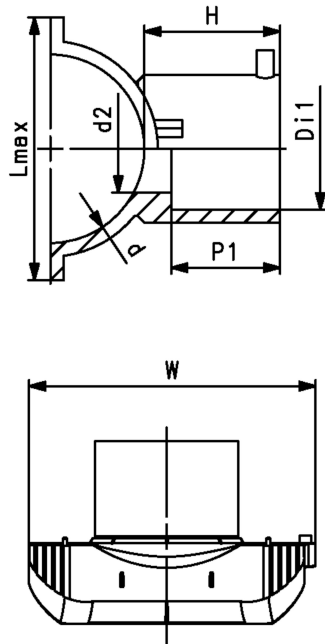

|   | d         | d2   | Do1  | DN        | PN    | Code               | Weight |
|---|-----------|------|------|-----------|-------|--------------------|--------|
|   | (mm)      | (mm) | (mm) | (mm)      | (bar) |                    | (kg)   |
|   | 280       | 65   | 90   | 250       | 16    | <b>193 135 099</b> | 1.242  |
|   | 280       | 86   | 110  | 250       | 16    | <b>193 135 100</b> | 1.295  |
|   | 280       | 86   | 125  | 250       | 16    | <b>193 135 101</b> | 1.530  |
|   | 315       | 65   | 90   | 300       | 16    | <b>193 135 109</b> | 1.214  |
|   | 315       | 86   | 110  | 300       | 16    | <b>193 135 110</b> | 1.297  |
|   | 315       | 86   | 125  | 300       | 16    | <b>193 135 111</b> | 1.530  |
|   | 355       | 65   | 90   | 350       | 16    | <b>193 135 119</b> | 1.214  |
|   | 355       | 86   | 110  | 350       | 16    | <b>193 135 120</b> | 1.297  |
|   | 355       | 86   | 125  | 350       | 16    | <b>193 135 121</b> | 1.530  |
| * | 400       | 65   | 90   | 400       | 16    | <b>193 135 329</b> | 1.022  |
| * | 400       | 86   | 110  | 400       | 16    | <b>193 135 330</b> | 1.116  |
| * | 400       | 86   | 125  | 400       | 16    | <b>193 135 331</b> | 1.369  |
|   | 450       | 65   | 90   | 450       | 16    | <b>193 135 339</b> | 1.022  |
|   | 450       | 86   | 110  | 450       | 16    | <b>193 135 340</b> | 1.116  |
|   | 450       | 86   | 125  | 450       | 16    | <b>193 135 341</b> | 1.369  |
| * | 500 - 630 | 65   | 90   | 500 - 600 | 16    | <b>193 135 159</b> | 1.086  |
| * | 500 - 630 | 86   | 110  | 500 - 600 | 16    | <b>193 135 160</b> | 1.159  |
| * | 500 - 630 | 86   | 125  | 500 - 600 | 16    | <b>193 135 161</b> | 1.388  |

|   | Lmax | P1   | W    | H    | Suitable for  |
|---|------|------|------|------|---------------|
|   | (mm) | (mm) | (mm) | (mm) |               |
|   | 243  | 82   | 260  | 102  | SDR Pipe 9-26 |
|   | 243  | 88   | 260  | 108  | SDR Pipe 9-26 |
|   | 243  | 99   | 260  | 129  | SDR Pipe 9-26 |
|   | 249  | 82   | 260  | 102  | SDR Pipe 9-26 |
|   | 249  | 88   | 260  | 108  | SDR Pipe 9-26 |
|   | 249  | 99   | 260  | 129  | SDR Pipe 9-26 |
|   | 249  | 82   | 260  | 102  | SDR Pipe 9-26 |
|   | 249  | 88   | 260  | 108  | SDR Pipe 9-26 |
|   | 249  | 99   | 260  | 129  | SDR Pipe 9-26 |
| * | 256  | 82   | 260  | 102  | SDR Pipe 9-26 |
| * | 256  | 88   | 260  | 108  | SDR Pipe 9-26 |
| * | 256  | 99   | 260  | 129  | SDR Pipe 9-26 |
|   | 256  | 82   | 260  | 102  | SDR Pipe 9-26 |
|   | 256  | 88   | 260  | 108  | SDR Pipe 9-26 |
|   | 256  | 99   | 260  | 129  | SDR Pipe 9-26 |
| * | 263  | 82   | 260  | 102  | SDR Pipe 9-26 |
| * | 263  | 88   | 260  | 108  | SDR Pipe 9-26 |
| * | 263  | 99   | 260  | 129  | SDR Pipe 9-26 |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

# Data sheet

valid from: 2/11/26



---

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
info.ps@georgfischer.com Internet: <http://www.gfps.com>