


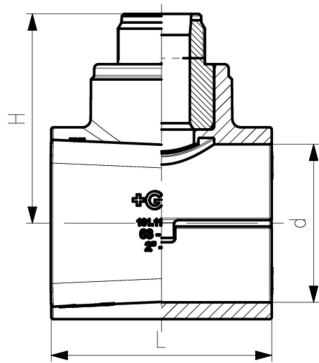

BSP PVC-U Clamp-on Saddle (metric and inch)

Model:

- Saddle with threaded outlet 1 1/4" NPSM
- Top saddle for solvent cement bonding
- Seal: Lip seal EPDM

Range of use:

- Compatible Signet flow sensors: type 2551, 2537, 515, 8510, 2536, 8512
- Compatible Signet pH/ORP sensors: type 2724, 2725, 2726, 2734, 2736, 2735

Attention:

- sensor length depends on installation fitting
- These fittings are only available from your local Georg Fischer sales office

Size (inch)	DN (mm)	PN	Sensor Type	D (mm)	H (mm)	H1 (mm)	L (mm)	Type	Code	Weight (kg)
3	80	15	Flow -X0, pH -XX	39	105	225	105	PVAS030	198 150 550	0.835
4	100	15	Flow -X0, pH -XX	39	114	264	105	PVAS040	198 150 551	0.885
6	150	15	Flow -X1	39	156	339	120	PVAS060	198 150 554	1.375

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>