




**SYGEF Plus flange adaptor jointing face serrated
SDR33/PN10
High Purity clean-room product ISO Class 5 (100)**

Model:

- Material: PVDF-HP

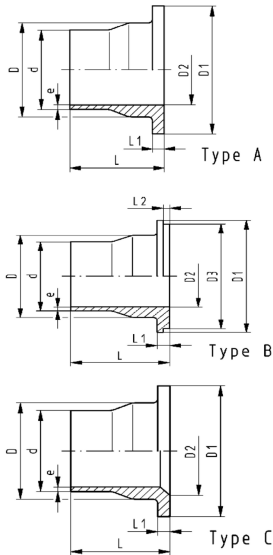

d	DN	PN	FM	Type	Code	Weight
(mm)	(mm)	(bar)				(kg)
90	80	10	BCF, IR	B	735 798 888	0.361
110	100	10	BCF, IR	A	735 798 889	0.471
125	100	10	IR	A	735 798 590	0.515
140	125	10	IR	A	735 798 891	0.738
160	150	10	IR	C	735 798 892	0.929
200	200	10	IR	C	735 798 894	1.704
225	200	10	IR	A	735 798 895	1.603
250	250	10	IR	C	735 798 596	2.730
280	250	10	IR	A	735 798 597	2.715
315	300	10	IR	C	735 798 598	3.657
355	350	10	IR	A	735 798 549	6.572
400	400	10	IR	C	735 798 550	7.970

d	L	L1	L2	D	D1	D2	D3	e	GP
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
90	81	12	4	105	138	78	133	2.8	10
110	81	13		125	158	100		3.4	4
125	82	14		132	158	114		3.9	8
140	90	16		155	188	127		4.3	5
160	93	17		175	212	151		4.9	5
200	102	22		232	268	207		6.2	4
225	102	22		235	268	207		6.9	4
250	120	22		285	320	249		7.7	2
280	120	22		291	320	249		8.6	1
315	120	22		335	370	300		9.7	1
355	170	30		373	430	330		10.9	1
400	175	32		427	482	396		12.3	1

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>