


T-kus 90° s nátrubky

- Materiálové provedení: **PVC, PE, PP, PPs, PP-EL-s, PVDF**
- Odbočkový T-kus 90°, rovný
- Hodnota Zeta = 1,1



Ø	PVC					PE/PP/PPs/PP-EL-s/PVDF				
	L	L1	L2	Tolerance	s	L	L1	L2	Tolerance	s
50	25	105	53	0,3	2,5	25	105	53	0,7	3,0
63	25	105	53	0,3	2,5	25	105	53	0,7	3,0
75	40	105	53	0,3	2,5	40	105	53	0,7	3,0
90	40	120	60	0,3	2,5	40	120	60	0,9	3,0
110	40	140	70	0,3	2,5	40	140	70	1,0	3,0
125	40	155	78	0,3	2,5	40	155	78	1,2	3,0
140	40	170	85	0,4	2,5	40	170	85	1,3	3,0
160	40	190	95	0,4	2,5	40	190	95	1,5	3,0
180	40	210	105	0,4	2,5	40	210	105	1,7	3,0
200	40	230	115	0,4	2,5	40	230	115	1,8	4,0
225	40	270	135	0,5	2,5	40	270	135	1,9	4,0
250	40	280	145	0,5	2,5	40	280	145	2,0	4,0
280	50	320	160	0,6	2,5	50	320	160	2,2	4,0
315	50	345	184	0,6	4,0	50	345	184	2,4	5,0
355	45	405	193	0,7	3,0	50	405	193	2,7	5,0
400	45	460	230	0,7	3,0	50	460	230	3,0	6,0
450	50	586	193	0,8	3,6	50	586	293	3,5	5,0
500	50	650	325	0,9	5,0	50	650	325	4,0	5,0
560	-	-	-	-	-	60	728	364	4,5	6,0
600	60	780	390	1,0	5,0	60	780	390	4,5	6,0
630	-	-	-	-	-	70	820	410	4,5	6,0
700	70	910	455	2,5	6,0	70	910	455	4,5	6,0
710	-	-	-	-	-	80	924	462	4,5	6,0
800	80	1040	520	3,0	8,0	80	1040	520	4,5	8,0
900	90	1170	585	3,0	8,0	90	1170	585	4,5	8,0
1000	100	1300	650	4,0	10,0	100	1300	650	5,0	10,0
1200	120	1560	780	4,0	12,0	120	1560	780	5,0	12,0
1250	130	1626	813	4,0	12,0	130	1626	813	5,0	12,0

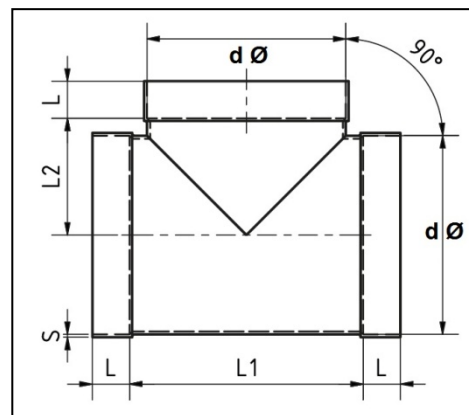