


## Redukce ecoFIT typ Flush PE100 d355-630mm / SDR11

### Provedení:

- Konvenční svařování natupo dle DVS 2207
- Upnutí do svařecího stroje musí být provedeno vždy na větším průměru (d1)
- Svařecí stroj natupo musí být vhodný pro svařování obou rozměrů (d1 a d2)

| d<br>(mm) | d1<br>(mm) | d2<br>(mm) | DN<br>(mm) | PN<br>(bar) | SDR | Kód         | Váha<br>(kg) | PF           |
|-----------|------------|------------|------------|-------------|-----|-------------|--------------|--------------|
| 355       | 355        | 225        | 350        | 16          | 11  | 753 909 809 | 5.230        | 2 68 240 041 |
| 355       | 355        | 250        | 350        | 16          | 11  | 753 909 810 | 3.752        | 2 68 240 041 |
| 355       | 355        | 280        | 350        | 16          | 11  | 753 909 811 | 4.066        | 2 68 240 041 |
| 355       | 355        | 315        | 350        | 16          | 11  | 753 909 812 | 4.149        | 2 68 240 041 |
| 400       | 400        | 225        | 400        | 16          | 11  | 753 909 816 | 7.964        | 2 68 240 041 |
| 400       | 400        | 250        | 400        | 16          | 11  | 753 909 817 | 6.861        | 2 68 240 041 |
| 400       | 400        | 280        | 400        | 16          | 11  | 753 909 818 | 6.679        | 2 68 240 041 |
| 400       | 400        | 315        | 400        | 16          | 11  | 753 909 819 | 6.460        | 2 68 240 041 |
| 400       | 400        | 355        | 400        | 16          | 11  | 753 909 820 | 6.101        | 2 68 240 041 |
| 450       | 450        | 225        | 450        | 16          | 11  | 753 909 822 | 11.965       | 2 68 240 041 |
| 450       | 450        | 250        | 450        | 16          | 11  | 753 909 823 | 11.087       | 2 68 240 041 |
| 450       | 450        | 280        | 450        | 16          | 11  | 753 909 824 | 9.604        | 2 68 240 041 |
| 450       | 450        | 315        | 450        | 16          | 11  | 753 909 825 | 9.091        | 2 68 240 041 |
| 450       | 450        | 355        | 450        | 16          | 11  | 753 909 826 | 8.656        | 2 68 240 041 |
| 450       | 450        | 400        | 450        | 16          | 11  | 753 909 827 | 8.369        | 2 68 240 041 |
| 500       | 500        | 225        | 500        | 16          | 11  | 753 909 829 | 16.053       | 2 68 240 041 |
| 500       | 500        | 250        | 500        | 16          | 11  | 753 909 830 | 15.784       | 2 68 240 041 |
| 500       | 500        | 280        | 500        | 16          | 11  | 753 909 831 | 14.691       | 2 68 240 041 |
| 500       | 500        | 315        | 500        | 16          | 11  | 753 909 832 | 10.921       | 2 68 240 041 |
| 500       | 500        | 355        | 500        | 16          | 11  | 753 909 833 | 11.321       | 2 68 240 041 |
| 500       | 500        | 400        | 500        | 16          | 11  | 753 909 834 | 12.453       | 2 68 240 041 |
| 500       | 500        | 450        | 500        | 16          | 11  | 753 909 835 | 12.640       | 2 68 240 041 |
| 560       | 560        | 315        | 600        | 16          | 11  | 753 909 836 | 22.204       | 2 68 240 041 |
| 560       | 560        | 355        | 600        | 16          | 11  | 753 909 837 | 19.976       | 2 68 240 041 |
| 560       | 560        | 400        | 600        | 16          | 11  | 753 909 838 | 17.215       | 2 68 240 041 |
| 560       | 560        | 450        | 600        | 16          | 11  | 753 909 839 | 14.263       | 2 68 240 041 |
| 560       | 560        | 500        | 600        | 16          | 11  | 753 909 840 | 13.955       | 2 68 240 041 |
| 630       | 630        | 315        | 600        | 16          | 11  | 753 909 841 | 29.984       | 2 68 240 041 |
| 630       | 630        | 355        | 600        | 16          | 11  | 753 909 842 | 29.376       | 2 68 240 041 |
| 630       | 630        | 400        | 600        | 16          | 11  | 753 909 843 | 26.541       | 2 68 240 041 |
| 630       | 630        | 450        | 600        | 16          | 11  | 753 909 844 | 23.034       | 2 68 240 041 |
| 630       | 630        | 500        | 600        | 16          | 11  | 753 909 845 | 19.243       | 2 68 240 041 |
| 630       | 630        | 560        | 600        | 16          | 11  | 753 909 846 | 17.438       | 2 68 240 041 |

| d<br>(mm) | L<br>(mm) | L1<br>(mm) | L2<br>(mm) | e1<br>(mm) | e2<br>(mm) |
|-----------|-----------|------------|------------|------------|------------|
| 355       | 130       | 95         | 10.0       | 32.2       | 20.5       |
| 355       | 115       | 80         | 10.0       | 32.3       | 22.7       |
| 355       | 115       | 80         | 10.0       | 32.3       | 25.4       |
| 355       | 115       | 80         | 15.0       | 32.3       | 28.6       |
| 400       | 145       | 110        | 10.0       | 36.3       | 20.5       |
| 400       | 135       | 100        | 10.0       | 36.4       | 22.7       |
| 400       | 135       | 100        | 10.0       | 36.4       | 25.4       |
| 400       | 135       | 100        | 10.0       | 36.4       | 28.6       |
| 400       | 135       | 100        | 13.0       | 36.4       | 32.3       |
| 450       | 165       | 125        | 10.0       | 40.9       | 20.5       |
| 450       | 160       | 120        | 10.0       | 40.9       | 22.7       |
| 450       | 150       | 100        | 15.0       | 40.9       | 25.4       |
| 450       | 150       | 100        | 15.0       | 40.9       | 28.6       |
| 450       | 150       | 100        | 15.0       | 40.9       | 32.3       |
| 450       | 150       | 100        | 15.0       | 40.9       | 36.4       |

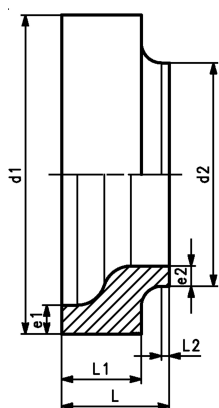

| d    | L    | L1   | L2   | e1   | e2   |
|------|------|------|------|------|------|
| (mm) | (mm) | (mm) | (mm) | (mm) | (mm) |
| 500  | 180  | 130  | 10.0 | 45.4 | 20.5 |
| 500  | 180  | 130  | 10.0 | 45.4 | 22.7 |
| 500  | 175  | 125  | 10.0 | 45.4 | 25.4 |
| 500  | 165  | 115  | 10.0 | 45.5 | 28.6 |
| 500  | 165  | 115  | 10.0 | 45.5 | 32.3 |
| 500  | 165  | 115  | 10.0 | 45.5 | 36.4 |
| 500  | 165  | 115  | 25.0 | 45.5 | 40.9 |
| 560  | 210  | 160  | 10.0 | 50.8 | 28.6 |
| 560  | 200  | 150  | 10.0 | 50.8 | 32.2 |
| 560  | 185  | 135  | 10.0 | 50.8 | 36.3 |
| 560  | 165  | 115  | 10.0 | 50.8 | 40.9 |
| 560  | 165  | 115  | 10.0 | 50.8 | 45.4 |
| 630  | 220  | 170  | 10.0 | 57.2 | 28.6 |
| 630  | 220  | 170  | 10.0 | 57.2 | 32.2 |
| 630  | 210  | 160  | 10.0 | 57.2 | 36.3 |
| 630  | 195  | 145  | 10.0 | 57.2 | 40.9 |
| 630  | 175  | 125  | 10.0 | 57.2 | 45.4 |
| 630  | 165  | 115  | 20.0 | 57.2 | 50.8 |

Technické údaje o produktech nejsou závazné. Konstrukční a rozměrové změny vyhrazeny.

Přeloženo z originálu výrobce

PPS Engineering CZ s.r.o., zastoupení Georg Fischer Piping Systems

info@ppsengineering.cz

www.ppsengineering.cz

© PPS 09/2021